




BEARING MANUFACTURING DE MEXICO, S.A.D...

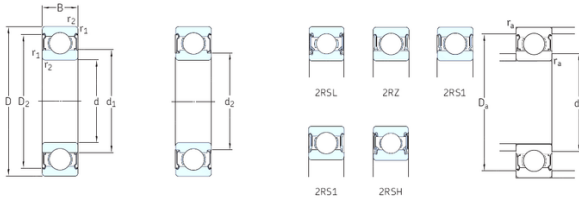

12 mm x 32 mm x 10 mm SKF 6201-RSH deep groove ball bearings

Bearing No. 6201-RSH

6201-RSH Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------------------|
| Size | 12x32x10 mm |
| Bore Diameter | 12 mm |
| Outer Diameter | 32 mm |
| Width | 10 mm |
| d | 12 mm |
| D | 32 mm |
| B | 10 mm |
| C | 10 mm |
| d1 | – mm |
| d2 | 16,6 mm |
| r1 min. | 16,2 mm |
| r2 min. | 16,2 mm |
| D1 | 27,4 mm |
| D2 | 0,6 mm |
| da min. | 16,5 mm |
| Da max. | 27,8 mm |
| ra max. | 0,6 mm |
| Weight | 0,038 Kg |
| Basic dynamic load rating (C) | 7,28 kN |
| Basic static load rating (C0) | 3,1 kN |
| Fatigue load limit (Pu) | 0,132 |
| Reference speed | – r/min |
| Limiting speed | 15000 r/min |
| Calculation factor (f0) | 12 |
| Category | Single Row Ball Bearings |



BEARING MANUFACTURING DE MEXICO,S.A.D...

| | |
|---------------------------------|--|
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.039 |
| EAN | 7316571845050 |
| Product Group | B00308 |
| Enclosure | 1 Seal |
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Enclosure Type | Contact Seal |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 12MM Bore; 32MM Outside Diameter; 10MM Outer Race Width; 1 Seal; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; C |
| Other Features | Deep Groove NBR Seal |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.skf.com |
| Manufacturer Item Number | 6201-RSH |
| Weight / LBS | 0.081 |



BEARING MANUFACTURING DE MEXICO, S.A.D...

| | |
|--------------------------------|----------------------------|
| Bore | 0.472 Inch 12 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Outer Race Width | 0.394 Inch 10 Millimeter |
| Outside Diameter | 1.26 Inch 32 Millimeter |
| d_2 | 16.2 mm |
| D_2 | 27.34 mm |
| d_a min. | 16.2 mm |
| d_a max. | 16.5 mm |
| D_a max. | 27.8 mm |
| r_a max. | 0.6 mm |
| Basic dynamic load rating C | 7.28 kN |
| Basic static load rating C_0 | 3.1 kN |
| Fatigue load limit P_u | 0.132 kN |
| Calculation factor k_r | 0.025 |
| Calculation factor f_0 | 12 |
| Mass bearing | 0.037 kg |