




BEARING MANUFACTURING DE MEXICO, S.A.D...

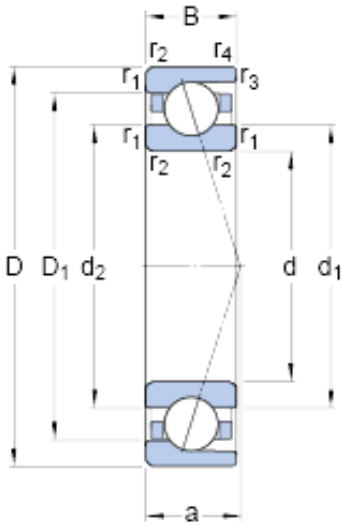

7007 ACD/HCP4A Bearing 2D drawings and 3D CAD models

35 mm x 62 mm x 14 mm SKF 7007 ACD/HCP4A angular contact ball bearings

Bearing No. 7007 ACD/HCP4A

Size	62x35x14 mm
Bore Diameter	62 mm
Outer Diameter	35 mm
Width	14 mm
d	35 mm
D	62 mm
B	14 mm
d ₁	43.7 mm
d ₂	43.7 mm
D ₁	53.3 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	18.5 mm
d _a - min.	39.6 mm
d _b - min.	39.6 mm
D _a - max.	57.4 mm
D _b - max.	60 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
d _n	45.3 mm
Basic dynamic load rating - C	14.8 kN
Basic static load rating - C ₀	9 kN
Fatigue load limit - P _u	0.38 kN
Limiting speed for grease	24000 r/min



BEARING MANUFACTURING DE MEXICO,S.A.D...

Lubrication	
Limiting speed for oil lubrication	38000 mm/min
Ball - D_w	7.938 mm
Ball - z	16
G_{ref}	1.98 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	90 N
Preload class B - G_B	180 N
Preload class C - G_C	360 N
Preload class D - G_D	720 N
Calculation factor - f	1.06
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2D}	1.08
Calculation factor - f_{HC}	1.02
Preload class A	95 N/micron
Preload class B	123 N/micron
Preload class C	160 N/micron
Preload class D	211 N/micron



BEARING MANUFACTURING DE MEXICO, S.A.D...

d_1	43.7 mm
d_2	43.7 mm
D_1	53.3 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	39.6 mm
d_b min.	39.6 mm
D_a max.	57.4 mm
D_b max.	60 mm
r_a max.	1 mm
r_b max.	0.3 mm
d_n	45.3 mm
Basic dynamic load rating C	14.8 kN
Basic static load rating C_0	9 kN
Fatigue load limit P_u	0.38 kN
Attainable speed for grease lubrication	24000 r/min
Attainable speed for oil-air lubrication	38000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	16
Reference grease quantity G_{ref}	1.98 cm ³
Preload class A G_A	90 N
Static axial stiffness, preload class A	95 N/ μ m
Preload class B G_B	180 N
Static axial stiffness, preload class B	123 N/ μ m
Preload class C G_C	360 N
Static axial stiffness, preload class C	160 N/ μ m
Preload class D G_D	720 N
Static axial stiffness, preload class D	211 N/ μ m



BEARING MANUFACTURING DE MEXICO,S.A.D...

class D	
Calculation factor f	1.06
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.08
Calculation factor f_{HC}	1.02
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.13 kg