




# BEARING MANUFACTURING DE MEXICO,S.A.D...

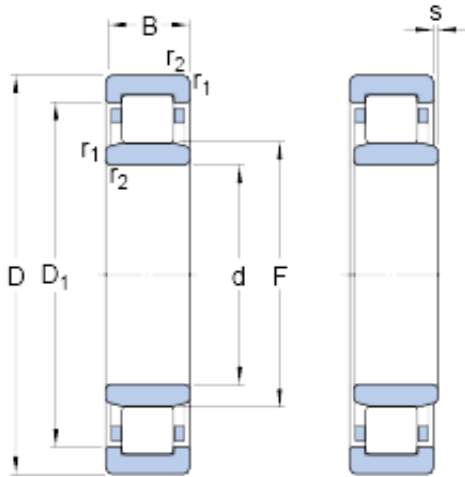

## 630 mm x 920 mm x 128 mm SKF NU 10/630 ECMA/HA2 thrust ball bearings

Bearing No. NU 10/630 ECMA/HA2

NU 10/630 ECMA/HA2 Bearing 2D drawings and 3D CAD models

Size	920x630x128 mm
Bore Diameter	920 mm
Outer Diameter	630 mm
Width	128 mm
d	630 mm
D	920 mm
B	128 mm
D <sub>1</sub>	837 mm
F	702 mm
r <sub>1,2</sub> - min.	7.5 mm
s	6.2 mm
d <sub>a</sub> - min.	658 mm
d <sub>a</sub> - max.	691 mm
d <sub>b</sub> - min.	707 mm
D <sub>a</sub> - max.	892 mm
r <sub>a</sub> - max.	6 mm
Basic dynamic load rating - C	3410 kN
Basic static load rating - C <sub>0</sub>	6200 kN
Fatigue load limit - P <sub>u</sub>	430 kN
Reference speed	630 r/min
Limiting speed	850 r/min
Calculation factor - k <sub>r</sub>	0.15
D <sub>1</sub>	837 mm
r <sub>1,2</sub> min.	7.5 mm



## BEARING MANUFACTURING DE MEXICO,S.A.D...

s max.	6.2 mm
$d_a$ min.	658 mm
$d_a$ max.	691 mm
$d_b$ min.	707 mm
$D_a$ max.	892 mm
$r_a$ max.	6 mm
Basic dynamic load rating C	3410 kN
Basic static load rating $C_0$	6200 kN
Fatigue load limit $P_u$	430 kN
Calculation factor $k_r$	0.15
Limiting value e	0.2
Axial load factor Y	0
Mass bearing	285 kg