




# BEARING MANUFACTURING DE MEXICO, S.A.D...

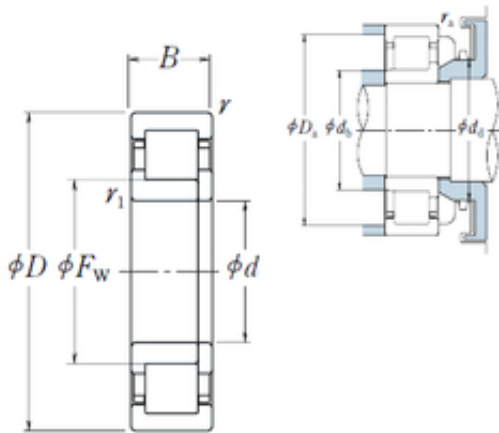

## 80 mm x 125 mm x 22 mm NSK NUP1016 cylindrical roller bearings

Bearing No. NUP1016

NUP1016 Bearing 2D drawings and 3D CAD models

Size	80x125x22 mm
Bore Diameter	80 mm
Outer Diameter	125 mm
Width	22 mm
d	80 mm
Fw	91,5 mm
D	125 mm
B	22 mm
C	22 mm
r min.	1,1 mm
r1 min.	1 mm
da min.	86,5 mm
db max.	90 mm
db min	85 mm
ra max.	1 mm
rb max.	1 mm
Db max	118,5 mm
Weight	0,969 Kg
Basic dynamic load rating (C)	72,5 kN
Basic static load rating (C0)	90,5 kN
(Grease) Lubrication Speed	5 300 r/min
hidYobi	NUP1016
LangID	1
D_	125
B_	22



## BEARING MANUFACTURING DE MEXICO,S.A.D...

hidTable	ecat_NSCLDR
Oil rpm	6300
rb	1
mass	1.03
GRS rpm	5300
ra	1
db max	90
TSR rpm	6000
C0	90.5
DE_	113.5
Prod_Type3	CRB_SR_NUP
da	86.5
DA_	11
Z_	21
D_a max	118.5
yobi	NUP1016
C_conv	72500
ALPHA_	0
SDM_	102.5
r	1.1
dc min	94
KBRG	4164
SBRG	10
r1	1
DI_	91.5