




BEARING MANUFACTURING DE MEXICO, S.A.D...

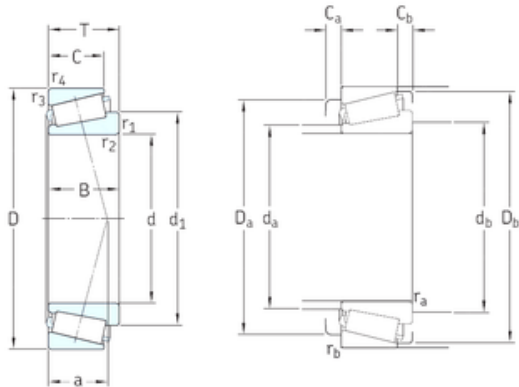

21,986 mm x 45,237 mm x 16,637 mm SKF
LM12749/710/Q tapered roller bearings

Bearing No. LM12749/710/Q

LM12749/710/Q Bearing 2D drawings and 3D CAD models

Size	21.986x45.237x15.494 mm
Bore Diameter	21,986 mm
Outer Diameter	45,237 mm
Width	15,494 mm
d	21,986 mm
D	45,237 mm
T	15,494 mm
B	16,637 mm
C	12,065 mm
a	10 mm
d1	33,9 mm
r1 min.	1,3 mm
r2 min.	1,3 mm
r3 min.	1,3 mm
r4 min.	1,3 mm
Ca min.	3 mm
Cb min.	3 mm
da max	28 mm
Da min	39 mm
Da max.	39,5 mm
db min	28,5 mm
Db min.	42 mm
ra max.	1,3 mm
rb max.	1,3 mm
Weight	0,12 Kg



BEARING MANUFACTURING DE MEXICO,S.A.D...

Basic dynamic load rating (C)	27,5 kN
Basic static load rating (C0)	31 kN
Fatigue load limit (Pu)	3,2
Reference speed	11000 r/min
Limiting speed	17000 r/min
Calculation factor (e)	0,31
Calculation factor (Y)	1,9