




BEARING MANUFACTURING DE MEXICO, S.A.D...

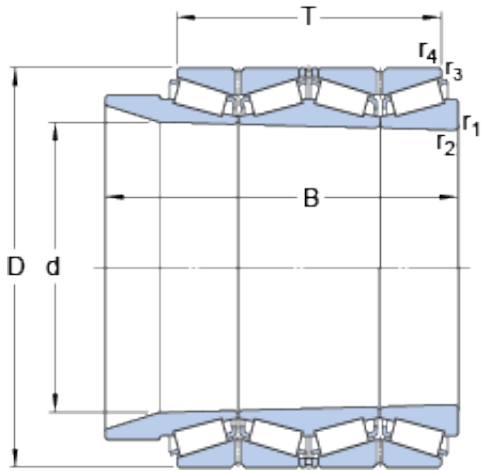

555.233 mm x 761.873 mm x 692.15 mm SKF
BT4B 334125/HA1 tapered roller bearings

Bearing No. BT4B 334125/HA1

BT4B 334125/HA1 Bearing 2D drawings and 3D CAD models

Size	761.873x555.233x692.15 mm
Bore Diameter	761,873 mm
Outer Diameter	555,233 mm
Width	692,15 mm
d	555.233 mm
D	761.873 mm
B	692.15 mm
T	536.575 mm
$r_{3,4}$ - min.	1.5 mm
Basic dynamic load rating - C	11700 kN
Basic static load rating - C_0	32000 kN
Fatigue load limit - P_u	2200 kN
Comparative radial load rating - C_F	3100 kN
Comparative axial load rating - C_{Fa}	500 kN
Thrust factor - K	1.76
Calculation factor - e	0.33
Calculation factor - Y_1	2
Calculation factor - Y_2	3
Calculation factor - Y_0	2
Mass bearing	990 kg
Design variant/feature	TQITE
	673.1 mm



d¹



BEARING MANUFACTURING DE MEXICO,S.A.D...

D_1	730 mm
$r_{1,2}$ min.	6.4 mm
$r_{3,4}$ min.	1.5 mm
Basic dynamic load rating C	11700 kN
Basic static load rating C_0	32000 kN
Fatigue load limit P_u	2200 kN
Comparative radial load rating C_F	3100 kN
Comparative axial load rating C_{Fa}	500 kN
Thrust factor K	1.76
Calculation factor e	0.33
Calculation factor Y_1	2
Calculation factor Y_2	3
Calculation factor Y_0	2